



- Type** • Cylindrical lock
- Certifications**
 - Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - 10 Year limited warranty
- Door Thickness** • 1³/₈–2¹/₄" (35–57 mm)
- Handing** • Non handed
- Backset**
 - 2³/₈" (70 mm)
 - 2³/₈" (60 mm) – available
 - 3³/₄" (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw
- Faceplate**
 - Mortise type, square corners
 - 1¹/₈x2¹/₄" (28.5x57 mm)
 - 2³/₈" (60 mm) backset : 1 x 2¹/₄" (25.4x57mm)
- Strike** • ASA Strike
- Trim**
 - Brass or stainless steel knob*
 - Brass or stainless steel rose*
 - Rose diameter: 3" (76 mm)

(*) Material dependant on finish.

- Chassis** • Concealed mounting plate and screws
 - Preparation**
 - Cross bore: 2¹/₈" (54 mm)
 - Edge bore: 1" (25.4 mm)
 - Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable

Other keyways and keying options available.
 - Functions**

00 Dummy, single	70 Classroom*
10 Passage	80 Storeroom*
40 Privacy	89 Exit
53 Entry*	

() Available without core cylinder (LC)*
 - Finish** C3–Polished brass, C32D–Stainless steel
- Other finishes available by special order*


T2B	53	C32D	238
SERIES	FUNCTION	FINISH	OPTION ¹

(1) OPTION: 238 2-3/8IN (60MM) BACKSET LC–LESS CORE (53 & 80)

SELECTION GUIDE

SERIES	FUNCTION ¹	FINISH ¹	/ CASE
T2B	00 Dummy, single	C3, C32D	100
T2B	10 Passage	C3, C32D	20
T2B	40 Privacy	C3, C32D	20
T2B	53 Entry ↻	C3, C32D	20
T2B	53 LC Entry, housing only (less core) ↻	C3, C32D	20
T2B	70 Classroom ↻	C3, C32D	20
T2B	70 LC Classroom, housing only (less core) ↻	C32D	20
T2B	80 Storeroom ↻	C3, C32D	20
T2B	80 LC Storeroom, housing only (less core) ↻	C3, C32D	20
T2B	89 Exit	C3, C32D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED
 ↻ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

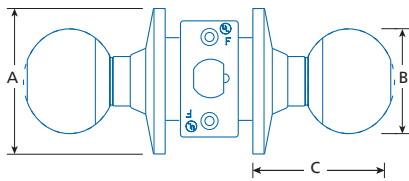

	A	B	C*
B (NON KEYED)	3 (76)	2 ¹ / ₈ (54)	2 ⁵ / ₈ -3 ¹ / ₁₆ (67-78)
B (KEYED)			2 ⁹ / ₁₆ -3 (65-76)

IN (MM) (*) DIMENSION VARIES WITH DOOR THICKNESS.

PARTS & ACCESSORIES



9102
Full lip D-Strike, adjustable tab; square corners:
1³/₄x2¹/₄" (44.5x57 mm)



9106
T-Strike, square corners:
1¹/₈x2³/₄" (28.5x70 mm)



9106NH
T-Strike, no hole; square corners:
1¹/₈x2³/₄" (28.5x70 mm)



ASA-T
ASA strike, adjustable tab; square corners



ASANH
ASA strike, no hole; square corners



TL020
Plastic spacer for latches with 1 x 2¹/₄"
(25.4x57 mm) faceplate to fit preparations
for 1¹/₈x2³/₄" (28.5x57 mm) faceplates



TL013
Backset extension to 3³/₄" (95 mm);
Use with 2³/₈" (60 mm) backset latch



TL014
Backset extension to 5" (127 mm);
Use with 2³/₄" (70 mm) backset latch Use with
2³/₄" (70 mm) backset latch



TL001
Passage latch: 2³/₈" (60 mm) backset,
1x2¹/₄" (25.4x57 mm) faceplate



TL003
Passage latch: 2³/₄" (70 mm) backset,
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



TL010
Privacy latch: 2³/₈" (60 mm) backset,
1x2¹/₄" (25.4x57 mm) faceplate



TL002
Privacy latch: 2³/₄" (70 mm) backset,
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



TL005
Deadlatch 2³/₈" (60 mm) backset
1x2¹/₄" (25.4x57 mm) faceplate



TL004
Deadlatch: 2³/₄" (70 mm) backset,
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



TL006
Deadlatch: 5" (127 mm) backset,
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

